

精密双边自动送料四柱油压裁断机

Automatic Double-side Precision Hydraulic Cutting Machine

HG-B60T, HG-B80T, HG-B100T, HG-B120T, HG-B150T, HG-B180T, HG-B200T

适用于裁切一次性泡沫吸塑包装, 珍珠棉包装, 汽车内饰等中大型片材。

Used for die cutting disposable blister or foam packaging, EPE foam packaging, automotive/plane interiors etc. large materials sheets.

伺服导轨送料 >>




选购配置:


- > PP板微动装置
- > 机械手吸盘
- > 装模装置

Optional :

- > PP Micro inching equipment
- > Mechanical arm
- > Small dies fixed tools

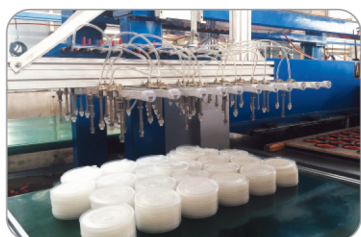

<< 吸盘机械手

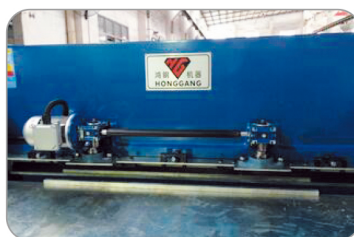

<< PP板微动装置

特点:

- > 可编程序逻辑控制器控制及触屏式显示屏, 可设定和控制工作压力, 裁断深度和送料速度, 操作更加简单精确、快速。
- > 双单边可选自动控制送料装置, 令整机生产效率提高两至三倍。
- > 双油缸, 四柱自动平衡连杆结构, 保证每个裁断位置裁断深度完全相同。
- > 油压动力系统, 裁断板下压接触到模具时自动慢切, 使裁料上下层无误差。
- > 中央自动润滑系统确保机器精密度和提高机器耐用度。

Features:

- > Controlled by PLC(Programmable Logic Controller), with touching screen, to set and micro-adjust working pressure, cutting depth, feeding speed easier, faster and more precise.
- > Double automatic working tables, increases the output twice or triple.
- > Auto-balance structure of double-cylinder, four-column and self-balance connecting rod, makes sure equal pressure in any working area.
- > Powered by hydraulic system, slow down when the cutting die touches material, to confirm the precision between upper and bottom for thick materials.
- > Central automatic lubrication system, increases machine durability, prolong the working time.

型号 Model	裁断力 Cutting Force	体积 Dimension	裁断区域 Cutting Area	马达 Motor	冲程 Stroke	净重 Net Weight
HG-B60T	60 Tons	3000X2300X1570 mm	810X1400 mm	5.5 kw	50-230 mm	4500 kg
HG-B80T	80 Tons	3000X2300X1570 mm	810X1400 mm	7.5 kw	50-230 mm	4800 kg
HG-B100T	100 Tons	3000X2300X1570 mm	810X1400 mm	7.5 kw	50-230 mm	5000 kg
HG-B120T	120 Tons	3000X2300X1570 mm	810X1400 mm	11 kw	50-230 mm	5500 kg
HG-B150T	150 Tons	3000X2300X1570 mm	810X1400 mm	11 kw	50-230 mm	6000 kg

说明: 裁断力50吨到300吨可选, 裁断区域、电压可按需提供。

Remark: Cutting force can be from 50 tons to 300tons; cutting area can be 610/710/810/910x1400/1600/1800mm, etc.